



# AUTO DOOR PILE SEAL

(A) Auto Door Seal shuts off wind, rain, dust and noise.  
Auto Door Seal is very helpful to energy savings.

(B) **SPECIAL FEATURE**


1. Pile seal is soft and it makes door easy to operate.
2. Film (double fins) in the center of seal makes better airtightness and watertightness.
3. Special treated pile has excellent water-resistant and restoring force.
4. Easy one-touch installation makes easy to clean seal.

(C) **INSTALLATION**


1. Cut Auto Door Seal according to height of door, and attach it to the door center of both sliding automatic.
2. Cut pile height to meet the gap if pile height is too high, to avoid too much friction between frame and door.

**CROSS SECTIONAL DETAILS**


**SIDE-CLIP EDGE SEALS ADS-R150 & ADS-L250**

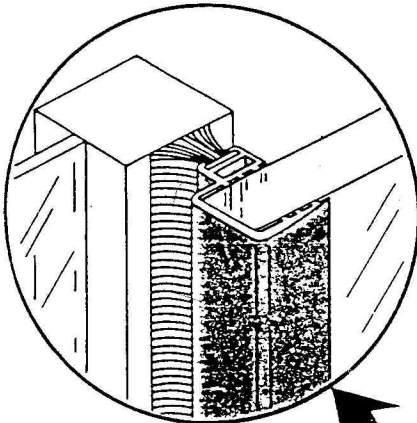


**CENTRE SEAL ADC-R40**

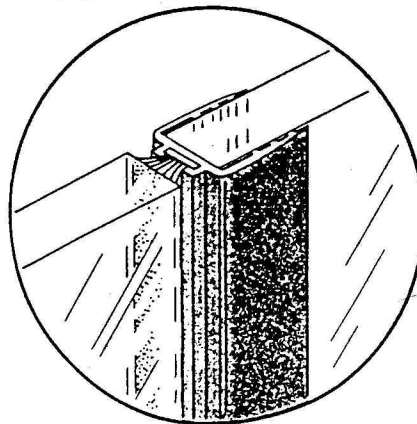

PART NO.	AUTO DOOR SEAL RANGE		
	ADS-R150 REGULAR TYPE	ADS-L250 L TYPE	ADC-R40 CENTRE SEALTYPE
SECTION DIMENSIONS			
LENGTH	: 2.3m	: 2.3m	: 2.3m
PACKING	30 pcs/ct	25 pcs/ct	30 pcs/ct
MATERIAL	PILE - POLYPROPYLENE		FRAME - P.V.C.
COLOR	PILE - GREY		FRAME - TRANSPARENCY

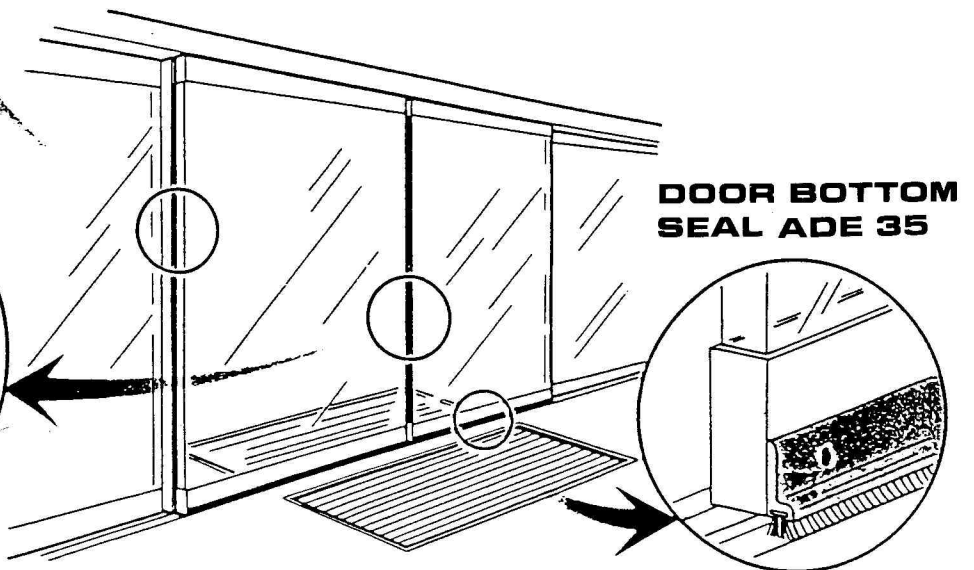

**DOOR BOTTOM SEAL ADE 35**

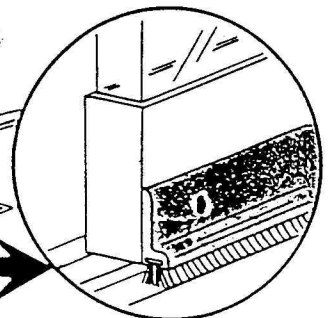

**SCHLEGEL PTY. LIMITED**

Head Office: 44-48 Riverside Road, Chipping Norton NSW 2170 Telephone: (02) 726 8477 Fax: (02) 724 7454

**Interstate Offices, New Zealand & Singapore**

Queensland: Telephone: (075) 96 5626 Fax: (075) 96 5386

Victoria: Telephone: (03) 894 2713 Fax: (03) 894 2729

Agent: South Australia: Umcos Trading Phone: (08) 212 1700 Fax: (08) 231 1643

Western Australia: Telephone (09) 307 4922 Fax: (09) 307 4923

Agent: New Zealand: Dynex Extrusions Phone: (09) 867 144 Fax: (09) 89 4588

Singapore: Telephone: (65) 3449288 Fax: (65) 3448333